

## STANDARD EQUIPMENT

### UNDERLIFT

Underlift Type: Two Section - Integrated		
Power Tilt & Fold	Positive	20°
	Negative	20°
L-Arm Wheel Grid Type	Self-Loading	
Underlift Lift / Tow Rating with L-Arms	Retracted	4,000 lbs / 7,500 lbs
	Extended	4,000 lbs / 7,500 lbs
Reach with L-Arms (rear of tailboard to centerline of L-arms)	Retracted	49"
	Extended	78"
Maximum Horizontal Towing Height with L-Arms		31"
	Hydraulic Extension	29"

### BODY

Fixed Width Modular Steel Body with Steel Diamond Plated Top  
Independently Rubber Shock Mounted Body  
Steel Light Pylon  
Fiberglass Fender Flares - as required by chassis  
Centerline of Rear Axle to Rear of Tailboard: 36"

### CONTROLS

Wired Non-Proportional Remote Control for All Functions with In-Cab Plug-In Provision and Accessible Manual Override Back-Up

### HYDRAULIC SYSTEM

Hydraulic Reservoir with Magnetic Clean-Out Provision and Replaceable 125 Micron Suction Strainer  
10 Micron In-Line Replaceable Return Filter with Service Indicator Gauge  
Chrome Plated Cylinder Rods  
System Overload Protection

### LIGHTING

FMVSS 108 Light Group Utilizing Weather Resistant Harnesses and Connectors  
DOT ID Light Strip  
Back-Up Lights (pair)  
Lower Hook-Up Lights (pair)

### PAINT

Prime Finish - Body / Black - Subframe, Underlift, Wheel Grid and L-Arms

### PTO

PTO and Pump Not Included - see PTO options

### STORAGE

Driver and Passenger Side Tool Compartments with Rubber Mats

### TOWING

Trailer Towing Adapter - ball not included

### MISCELLANEOUS

Mud Flaps  
Back-Up Alarm  
4-Way Receptacle for Auxiliary Tow Lights  
Pylon Mounted License Plate Holder

## OPTIONAL EQUIPMENT

### WINCH

Single 8,000 lb High Speed Worm Gear Winch with 3/8" Dia x 75' Long (6 x 25 IWRC RRL EIPS) Cable, Cable Tensioner Plate, Cable Roller Guide and Manual T-Handle Free Spool Release  
3/8" Dia x 110' Long (6 x 25 IWRC RRL EIPS) Winch Cable ILO Standard Winch Cable

### CONTROLS

Wireless Non-Proportional Control for All Functions in addition to Standard Controls (8 or 10 function remote)

### LIGHTING

Emergency Lightbar - choice of 58" Amber Halogen Rotator Lightbar (2 corner, 2 center, 2 LED S/T/T, 2 work lights and DOT ID light), or 10-Head 58" Amber LED Lightbar (4 corner, 6 center, 2 LED S/T/T, 2 work lights and DOT ID light), or 6-Head 58" Amber Strobe Lightbar (4 corner, 2 center, 2 LED S/T/T, 2 work lights and DOT ID light)  
Dual Emergency Lightbars - choice of 22" Amber Halogen Rotator Lightbars (pair) or 2-Head 22" Amber Strobe Lightbars (pair)

Fold Down Lightbar Bracket

LED Stop/Tail/Turn and Marker Lights

Upper Work Lights (pair)

Pre-Wiring for Emergency Lightbar - (not required with Emergency Lightbar option)

Magnetic Tow Light Kit with Case

Suction Mounted Tow Light Kit with Case

Various In-Dash and Under-Dash Switch Panels

### PAINT

Custom Paint Colors Available - Body, Tunnel Tool Compartment and Light Pylon Only

### PTO

Two Gear Cable Shift PTO with Engagement Indicator Light and Direct Mount Gear Pump - 11 gpm @ 1,000 rpm

Two Gear Air Shift PTO and Direct Mount Gear Pump with Engagement Indicator Light - 11 gpm @ 1,000 rpm

Two Gear E-Hydra Shift PTO and Direct Mount Gear Pump with Engagement Indicator Light - 11 gpm @ 1,000 rpm

Two Gear Lectra Shift PTO and Direct Mount Gear Pump with Engagement Indicator Light - 11 gpm @ 1,000 rpm

Clutch Shift PTO and Direct Mount Gear Pump with Engagement Indicator Light - 11 gpm @ 1,000 rpm

Engine Driven Hydraulic Clutch Pump

### STORAGE

24" Aluminum Tunnel Tool Compartment - includes Tool Compartment Mounted Aluminum Light Pylon ILO Standard Pylon, Inside Pylon Dress-Up Covers, Amber Marker Lights in Pylon (one per side) and Auto On/Off Lights & Rubber Mats in Tunnel Tool Compartment

### TOWING

Light Duty Tow Sling

Self-Loading Dollies with Storage Brackets and Steel or Aluminum Telescopic Cross Rails

Self-Loading Dolly Wheel Covers

Motorcycle Towing Adapter

1-7/8", 2" or 2-5/16" Dia Trailer Ball - 3,000 lb lift / 5,000 lb; 5,000 lb; 7,500 lb respective tow rating

Low Angle Grid Mounted Recovery Sheave (standard w/ tow sling)

### MISCELLANEOUS

CAD Plated 3/4" D-Rings

Fire Extinguisher - 2.5 lb (mounted units only)

In-Cab Remote Control Transmitter Holder with Warning Signal

Increased Capacity Aftermarket Fuel Tank (select chassis only)

Jump Start Kit

Reflective Safety Triangle Kit (set of 3 with case)

Stainless Steel Wheel Simulators

Steel Push Bumper with Grille Guard

Large Aluminum Wheel Chocks with Storage Brackets (pair)

Rubber Wheel Chocks (pair)

Tool Compartment Storage for Wheel Spacers

Valve Stem Extension Kit with Brackets (for 19.5" to 24.5" wheels only)

All dimensions are based on a 34.50" truck frame height and are rounded to the nearest inch.  
Values subject to change without notice.




Jerr-Dan Corporation, An Oshkosh Corporation Company

Specifications, descriptions and illustrative material contained within this literature are accurate as known at the time of publication, but are subject to change, without notice, as a result of continuous product improvements. Illustrations may include optional equipment and accessories and may not include all standard equipment. Always check with an authorized sales representative or call 800-926-9666 for current information.

Jerr-Dan and the Jerr-Dan logo are registered trademarks of Jerr-Dan Corporation, Greencastle PA USA. ©Copyright Jerr-Dan Corporation, 1080 Hykes Road, Greencastle PA 17225 • 800-926-9666 • 717-597-7111 • Fax: 717-593-6183 • www.jerr-dan.com

JD-0003-ELEWKR  
5/08

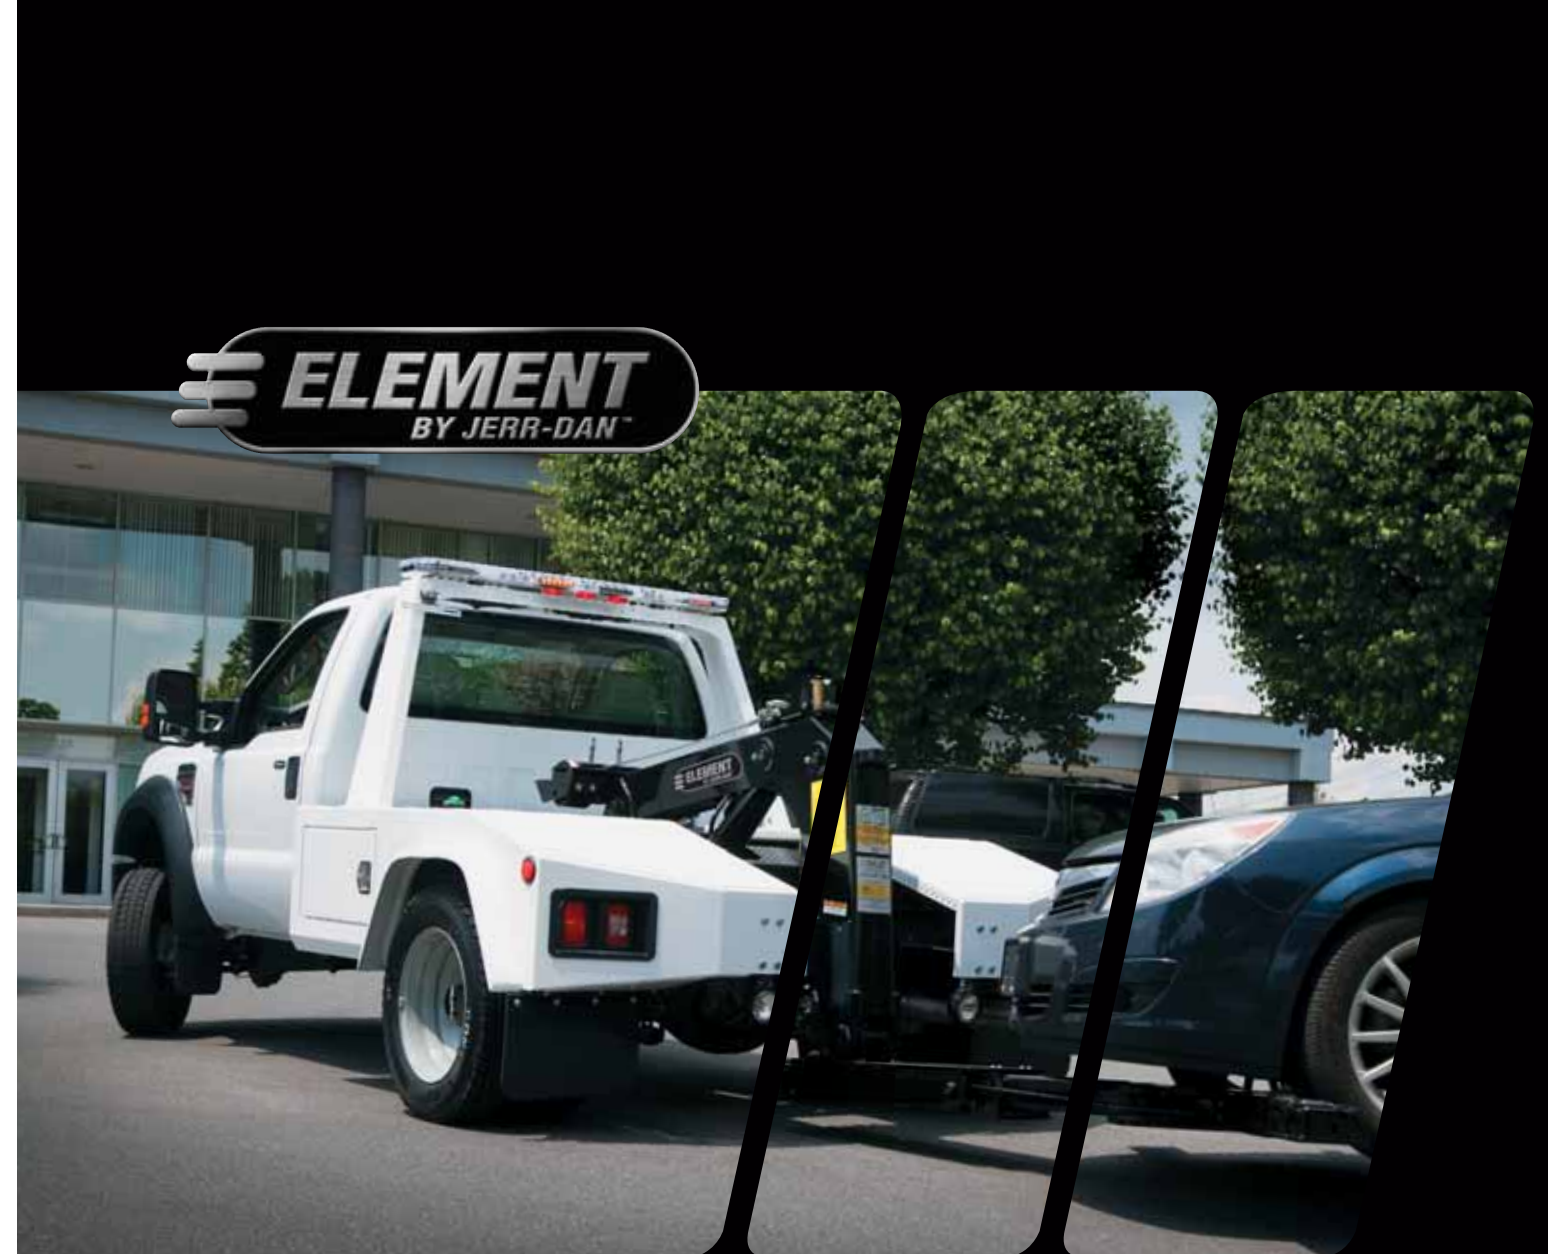

# WRECKER

# ELEMENT

Sometimes it's best to get practical.

This isn't complicated. There are times you simply need to get in, get a car and get going. For those jobs, it's best to get the Element by Jerr-Dan™. Built and backed by one of the most proven names in the towing industry, the Element combines common sense reliability with street sense agility.

The following innovative Jerr-Dan® engineering features come standard:

- Patented over-center LOCKLINK mechanism which locks wheel retaining arms in the full tire-engaged position.
- Adjustable Underlift Level Stop Assist System that provides an interrupt to the remote control signal to stop the underlift at a desired loading position.
- Negative Tilt feature on the wheel lift, perfect for repossessing vehicles in parking ramps.
- Sturdy steel body that handles the rigors of street life.

## Recommended Chassis Requirements

	Rating
Minimum GVWR	11,000 lbs
Minimum Cab to Axle (clear)	60"
Minimum Frame RBM (each rail)	230,000 in-lbs
Maximum Unloaded Frame Height	36"
Minimum Frame Length Behind Center of Rear Axle	36"



## PERFORMANCE YOU NEED

### AT THE VALUE YOU WANT

#### Grid Clearance

The 4-1/2" high hydraulic crossbar assures clearance for even the lowest profile vehicles.

#### Headboard

Provides clear visibility to your entire surroundings.

#### Deck Top

Deck top is clear and spacious.

#### Body Side

Body design offers a clean and streamlined look.

#### Tool Storage Compartment

Driver and passenger side tool compartments have rubber mats and ample storage for all your tools.

#### Winch

Optional single 8,000 lb worm gear winch is durable, fast and reliable.

#### Trailer Hitch

Available trailer towing adapter on wheel-lift grid – ball not included.

#### Wheel-Lift Grids

Hydraulic Self-Loader – low-profile crossbar with friction-adjustable, self-centering feature.

## Specifications

	Distance	Rating
A. Centerline of Rear Axle to Rear of Tailboard	36"	
B. Reach with L-Arms, retracted (rear of tailboard to centerline of L-Arms)	49"	4,000 lbs
C. Reach with L-Arms, extended (rear of tailboard to centerline of L-Arms)	78"	4,000 lbs
D. Maximum Horizontal Towing Height with L-Arms	31"	

Note: All values are based on a 34.50" truck frame height and are rounded to the nearest inch.

Values subject to change without notice.

